



## King's Research Portal

DOI:

[10.1109/LWC.2018.2878706](https://doi.org/10.1109/LWC.2018.2878706)

*Document Version*

Publisher's PDF, also known as Version of record

[Link to publication record in King's Research Portal](#)

*Citation for published version (APA):*

Huang, W., Yang, Z., Pan, C., Pei, L., Chen, M., Shikh-Bahaei, M., Elkashlan, M., & Nallanathan, A. (2019). Joint Power, Altitude, Location and Bandwidth Optimization for UAV with Underlaid D2D Communications. *IEEE Wireless Communications Letters*, 8(2), 524-527. [8514812]. <https://doi.org/10.1109/LWC.2018.2878706>

### **Citing this paper**

Please note that where the full-text provided on King's Research Portal is the Author Accepted Manuscript or Post-Print version this may differ from the final Published version. If citing, it is advised that you check and use the publisher's definitive version for pagination, volume/issue, and date of publication details. And where the final published version is provided on the Research Portal, if citing you are again advised to check the publisher's website for any subsequent corrections.

### **General rights**

Copyright and moral rights for the publications made accessible in the Research Portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognize and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the Research Portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the Research Portal

### **Take down policy**

If you believe that this document breaches copyright please contact [librarypure@kcl.ac.uk](mailto:librarypure@kcl.ac.uk) providing details, and we will remove access to the work immediately and investigate your claim.

# Joint Power, Altitude, Location and Bandwidth Optimization for UAV With Underlaid D2D Communications

Wenhuan Huang, Zhaohui Yang, Cunhua Pan<sup>ID</sup>, Lu Pei<sup>ID</sup>, Ming Chen, Mohammad Shikh-Bahaei, Maged Elkashlan<sup>ID</sup>, and Arumugam Nallanathan<sup>ID</sup>, *Fellow, IEEE*

**Abstract**—In this letter, we aim to maximize the rate of a device-to-device (D2D) pair for a downlink unmanned aerial vehicle (UAV)-aided wireless communication system, where D2D users coexist in an underlaying manner. We jointly optimize the transmit power of the UAV and D2D users, the flying altitude and location of the UAV and ground terminals' allocated bandwidth. To solve this problem, an iterative algorithm with low complexity is accordingly proposed. Simulation results show that the altitude of the UAV has an important impact on the system performance.

**Index Terms**—UAV communications, D2D communications, altitude and location optimization, power allocation, bandwidth allocation.

## I. INTRODUCTION

RECENTLY, wireless communication assisted by unmanned aerial vehicles (UAVs) has been regarded as a promising technique which can provide economical wireless access for mobile devices without deploying fixed network infrastructure [1]. Different from conventional terrestrial communications, UAVs act as flying base stations (BSs) in UAV-aided wireless communications and bring plenty of benefits. Owing to their agility and mobility, UAVs can be deployed to support temporary or urgent events over a wide area, which enhances the quality of service for ground terminals (GTs). Moreover, links between UAVs and GTs are dominated by line-of-sight (LoS) connections, leading to enhanced data rate.

To fully reap the benefits of UAV-aided communications, it is crucial to exploit the UAV mobility in a three-dimensional space. To address the UAV deployment challenge, an efficient deployment approach based on the circle packing theory was proposed in [2]. For capacity enhancement, Sharma *et al.* [3]

presented a cost function based multiple UAVs deployment model. By taking beamwidth into account, a joint UAV altitude and beamwidth optimization problem for UAV-aided multiuser communication systems was studied in [4]. Through jointly optimizing altitude, beamwidth and bandwidth, the sum power was further minimized in [5].

Apart from UAV-aided wireless communications, device-to-device (D2D) communication has been regarded as one of the crucial technologies in future wireless communication networks [6]. D2D communication allows direct transmissions between users in proximity, which is helpful in offloading network traffic and reducing end-to-end delay. Compared to the previous investigations on D2D communication underlaying cellular networks [7], the coexistence of UAVs and underlaid D2D communications will introduce new interference management challenges. Unlike fixed BSs, the altitude of the UAV is adjustable and will influence channel characteristics. Moreover, the impacts of the mobility of the UAV on D2D communications should be analyzed. In [8], a UAV flight pattern selection problem for D2D communications in disaster areas was studied. Mozaffari *et al.* [9] focused on the performance analysis of the coexistence between the UAV and an underlaid D2D communication network in a downlink scenario. However, to our best knowledge, there is no existing work studying the performance of UAVs with underlaid D2D communications from the optimization point of view.

In this letter, we aim to maximize the rate of a D2D pair for a downlink UAV-aided wireless communication system, where D2D users coexist in an underlaying manner. We formulate the problem of joint power, altitude, location and bandwidth optimization. In order to solve this nonconvex rate maximization problem, we propose a low-complexity iterative algorithm. It turns out to have attractive closed-form solutions for power allocation subproblem and altitude planning subproblem.

## II. SYSTEM MODEL AND PROBLEM FORMULATION

We consider a downlink UAV-aided wireless communication system<sup>1</sup> with one flying UAV,  $K$  GTs and one D2D pair which coexists in an underlaying manner. The horizontal and vertical locations of the D2D receiver, D2D transmitter and GT  $k$  are denoted by  $\mathbf{r} = (0, 0)$ ,  $\mathbf{t} = (t(1), t(2))$  and  $\mathbf{g}_k = (g_k(1), g_k(2))$ , respectively. The altitude of the D2D pair and GTs are assumed to be zero. The UAV is deployed as a flying BS at an altitude  $H$  with horizontal and vertical location  $\mathbf{u} = (x, y)$ .

<sup>1</sup>We consider the system where all terminals are equipped with a single isotropic antenna. When each user is equipped with one antenna, the optimization problem becomes more tractable. Moreover, it is appealing to equip each device with only one antenna to reduce the implementation complexity.

Manuscript received October 1, 2018; accepted October 25, 2018. Date of publication October 30, 2018; date of current version April 9, 2019. This work was supported in part by the National Natural Science Foundation of China under Grant 61871128, Grant 61521061, and 61571125, and in part by the Engineering and Physical Science Research Council through SENSE under Grant EP/P003486/1. The work of M. Elkashlan was supported by the EPSRC under Project EP/N029666/1. The work of A. Nallanathan was supported by EPSRC under Project EP/M016145/2. The associate editor coordinating the review of this paper and approving it for publication was C. Huang. (Corresponding author: Cunhua Pan.)

W. Huang, L. Pei, and M. Chen are with the National Mobile Communications Research Laboratory, Southeast University, Nanjing 210096, China (e-mail: huang\_wenhuan@seu.edu.cn; peilu@seu.edu.cn; chenming@seu.edu.cn).

Z. Yang and M. Shikh-Bahaei are with the Centre for Telecommunications Research, King's College London, London WC2B 4BG, U.K. (e-mail: yang.zhaohui@kcl.ac.uk; m.sbahaei@kcl.ac.uk).

C. Pan, M. Elkashlan, and A. Nallanathan are with the School of Electronic Engineering and Computer Science, Queen Mary University of London, London E1 4NS, U.K. (e-mail: c.pan@qmul.ac.uk; maged.elkashlan@qmul.ac.uk; a.nallanathan@qmul.ac.uk).

Digital Object Identifier 10.1109/LWC.2018.2878706

We consider the case that GTs and the D2D receiver are located outdoors, and the channel between the UAV and each GT (D2D receiver) is dominated by the LoS path. The downlink channel power gain between the UAV and GT  $k$  is given by [4]

$$h_k^u = \frac{\beta_0}{\|\mathbf{u} - \mathbf{g}_k\|^2 + H^2}, \quad (1)$$

where  $\beta_0$  denotes the channel power gain between the UAV and GTs (D2D receiver) at the unit distance, and  $\|\cdot\|$  is the Euclid norm. Similarly, the downlink channel power gain between the UAV and the D2D receiver is

$$h_0^u = \frac{\beta_0}{\|\mathbf{u}\|^2 + H^2}. \quad (2)$$

The downlink achievable rate of GT  $k$  can be expressed as

$$r_k^g = a_k \log_2 \left( 1 + \frac{p_k^u}{p_d h_k^d + \sigma^2} \frac{\beta_0}{\|\mathbf{u} - \mathbf{g}_k\|^2 + H^2} \right), \quad (3)$$

where  $a_k$  denotes the allocated bandwidth proportion for GT  $k$ ,  $p_k^u$  denotes the transmit power from UAV to GT  $k$ ,  $p_d$  is the transmit power of the D2D transmitter,  $h_k^d$  is the channel power gain between the D2D transmitter and GT  $k$ , and  $\sigma^2$  is the power of the additive white Gaussian noise.

We aim for maximizing the rate of the D2D pair while satisfying the minimal rate requirements of all GTs via power, altitude, location and bandwidth optimization. Mathematically, the D2D pair achievable rate maximization problem is

$$\max_{p_d, \mathbf{p}_u, \mathbf{a}, \mathbf{u}, H} \log_2 \left( 1 + \frac{p_d h_0^d}{\sum_{k=1}^K a_k p_k^u \frac{\beta_0}{H^2 + \|\mathbf{u}\|^2} + \sigma^2} \right) \quad (4a)$$

$$\text{s.t.} \quad 0 \leq p_d \leq P_d^{\max}, \quad (4b)$$

$$0 \leq \sum_{k=1}^K p_k^u \leq P_u^{\max}, \quad (4c)$$

$$r_k^g \geq R_{\min}, \quad \forall k = 1, \dots, K, \quad (4d)$$

$$H_{\min} \leq H \leq H_{\max}, \quad (4e)$$

$$a_k \geq 0, \quad \forall k = 1, \dots, K, \quad (4f)$$

$$\sum_{k=1}^K a_k = 1, \quad (4g)$$

where  $\mathbf{p}_u = (p_1^u, \dots, p_K^u)$ ,  $\mathbf{a} = (a_1, \dots, a_K)$ ,  $h_0^d$  is the channel power gain between the D2D transmitter and the corresponding receiver,  $[H_{\min}, H_{\max}]$  denotes the feasible region of the UAV's altitude  $H$ . It should be noted that the Doppler frequency shift is low and can be neglected for the slow speed of D2D devices, the D2D channel is frequency-flat over the whole bandwidth according to [10] and [11]. Note that the D2D pair reuses the whole bandwidth, which indicates that  $a_k$  is interpreted as the probability of receiving interference from GT  $k$  and the rate of the D2D can be modeled as (4a) according to [11]. The power restrictions for the D2D pair and GTs are respectively formulated in (4b) and (4c). Equation (4d) ensures that each GT should satisfy the minimum rate requirement. Equations (4f) and (4g) indicate bandwidth allocation requirements.

### III. SOLUTION APPROACH

Due to (4a) and (4d), Problem (4) is a nonconvex problem. It is difficult to obtain its globally optimal solution. In the following, we propose a low-complexity iterative algorithm.

Since (4a) is a monotonically decreasing function of  $p_k^u$ , the data rate constraints in (4d) for GTs should hold with equality at the optimal point. As a result, we have

$$p_k^{u*} = \frac{2^{\frac{R_{\min}}{a_k}} - 1}{\beta_0} (\|\mathbf{u} - \mathbf{g}_k\|^2 + H^2) (p_d h_k^d + \sigma^2), \quad (5)$$

where  $p_k^{u*}$  denotes the optimal solution of  $p_k^u$ .

To ensure that Problem (4) is feasible, we employ the feasibility checking algorithm. The feasibility checking problem is the minimization of transmit power of the UAV subject to constraints (4b), (4d)-(4g). If the minimal sum power of the UAV is larger than  $P_u^{\max}$ , Problem (4) is infeasible. Since  $p_k^{u*}$  is the minimal value of  $p_k^u$  according to (4d), the feasibility checking problem is equivalent to obtain the minimum value  $v^*$  of  $\sum_{k=1}^K p_k^{u*}$ , when  $p_d = 0$ ,  $H = H_{\min}$ , and constrains (4f) and (4g) are satisfied. An exhaustive algorithm can be adopted to solve it. With fixed  $\mathbf{u}$ , the optimal bandwidth allocation  $\mathbf{a}$  can be obtained via the interior point method. The optimal  $\mathbf{u}$  is obtained via the two-dimensional (2D) exhaustive search. As a result, Problem (4) is feasible if and only if when  $P_u^{\max} \geq v^*$ .

Based on (5) and the fact that  $\log_2(1+x)$  is a monotonically increasing function, Problem (4) is equivalent to

$$\max_{p_d, \mathbf{a}, \mathbf{u}, H} \frac{p_d h_0^d}{\sum_{k=1}^K a_k \left( 2^{\frac{R_{\min}}{a_k}} - 1 \right) \frac{\|\mathbf{u} - \mathbf{g}_k\|^2 + H^2}{H^2 + \|\mathbf{u}\|^2} (p_d h_k^d + \sigma^2) + \sigma^2} \quad (6a)$$

$$\text{s.t.} \quad 0 \leq \sum_{k=1}^K \frac{2^{\frac{R_{\min}}{a_k}} - 1}{\beta_0} (\|\mathbf{u} - \mathbf{g}_k\|^2 + H^2) (p_d h_k^d + \sigma^2) \leq P_u^{\max}, \quad (6b)$$

$$(4b), (4e) - (4g). \quad (6c)$$

To solve Problem (6), an iterative algorithm is proposed.

#### A. Optimal Power Allocation

With fixed  $\mathbf{a}$ ,  $\mathbf{u}$  and  $H$  in Problem (6), the power allocation problem is given by

$$\max_{p_d} \frac{p_d h_0^d D_0}{p_d M + \sigma^2 (N + D_0)} \quad (7a)$$

$$\text{s.t.} \quad 0 \leq p_d \leq \bar{P}_d^{\max}, \quad (7b)$$

where  $D_0 = \|\mathbf{u}\|^2 + H^2$ ,  $M = \sum_{k=1}^K a_k A_k D_k h_k^d$ ,  $A_k = 2^{\frac{R_{\min}}{a_k}} - 1$ ,  $D_k = \|\mathbf{u} - \mathbf{g}_k\|^2 + H^2$ ,  $N = \sum_{k=1}^K a_k A_k D_k$ , and  $\bar{P}_d^{\max} = \min \left\{ P_d^{\max}, \left\{ \frac{\beta_0 P_u^{\max} - \sigma^2 \sum_{k=1}^K A_k D_k}{\sum_{k=1}^K A_k D_k h_k^d} \right\} \right\}$ .

Observing that (7a) is an increasing function of  $p_d$ , the optimal power solution of Problem (7) is  $p_d^* = \bar{P}_d^{\max}$ .

#### B. Altitude and Location Planning

Then, we investigate the altitude and location planning with fixed D2D transmit power and bandwidth allocation. Since  $\frac{p_d h_0^d}{x + \sigma^2}$  is a decreasing function with  $x > 0$ , the altitude and

location planning problem can be formulated as

$$\min_{\mathbf{u}, H} \sum_{k=1}^K B_k \frac{\|\mathbf{u} - \mathbf{g}_k\|^2 + H^2}{H^2 + \|\mathbf{u}\|^2} \quad (8a)$$

$$\text{s.t.} \quad \sum_{k=1}^K A_k C_k (\|\mathbf{u} - \mathbf{g}_k\|^2 + H^2) \leq \beta_0 P_u^{\max}, \quad (8b)$$

$$H_{\min} \leq H \leq H_{\max}, \quad (8c)$$

where  $C_k = p_d h_k^d + \sigma^2$  and  $B_k = a_k A_k C_k$ . To solve Problem (8), we first obtain the optimal  $H$  under given  $\mathbf{u}$ , and then adopt the 2D exhaustive search to find the optimal solution of  $\mathbf{u}$  to Problem (8). Under fixed  $\mathbf{u}$ , constraint (8b) is

$$H \leq \sqrt{\frac{\beta_0 P_u^{\max} - \sum_{k=1}^K A_k \|\mathbf{u} - \mathbf{g}_k\|^2 C_k}{\sum_{k=1}^K A_k C_k}} \triangleq H_0, \quad (9)$$

It should be noticed that in order to make the altitude planning problem feasible,  $H_{\min}$  should satisfy  $H_{\min} \leq H_0$ . Assuming it is satisfied, constraint (8c) is transferred to

$$H_{\min} \leq H \leq \bar{H}_{\max}, \quad (10)$$

where  $\bar{H}_{\max} = \min\{H_{\max}, H_0\}$ . Therefore, the altitude planning problem with fixed  $\mathbf{u}$  becomes

$$\min_H \sum_{k=1}^K B_k \frac{\|\mathbf{u} - \mathbf{g}_k\|^2 + H^2}{H^2 + \|\mathbf{u}\|^2} \quad (11a)$$

$$\text{s.t.} \quad (10). \quad (11b)$$

Defining function  $b(x) = \sum_{k=1}^K B_k \frac{\|\mathbf{u} - \mathbf{g}_k\|^2 + x}{x + \|\mathbf{u}\|^2}$ , we have

$$b'(x) = \frac{\|\mathbf{u}\|^2 \sum_{k=1}^K B_k - \sum_{k=1}^K B_k \|\mathbf{u} - \mathbf{g}_k\|^2}{(x + \|\mathbf{u}\|^2)^2}, \quad (12)$$

and we consider the optimal altitude planning in the following two cases.

1) Case 1:  $\sum_{k=1}^K B_k \|\mathbf{u}\|^2 \geq \sum_{k=1}^K B_k \|\mathbf{u} - \mathbf{g}_k\|^2$ .

In this case, we have  $b'(x) \geq 0$ , and  $b(x)$  is an increasing function. Since  $H^2$  is an increasing function of  $H$  when  $H_{\min} \leq H \leq \bar{H}_{\max}$ , the optimal altitude of Problem (11) is

$$H^*(\mathbf{u}) = H_{\min}. \quad (13)$$

2) Case 2:  $\sum_{k=1}^K B_k \|\mathbf{u}\|^2 < \sum_{k=1}^K B_k \|\mathbf{u} - \mathbf{g}_k\|^2$ .

In this case,  $b(x)$  is a monotonically decreasing function. The optimal altitude planning of Problem (11) is

$$H^*(\mathbf{u}) = \bar{H}_{\max}. \quad (14)$$

After obtaining the optimal  $H^*(\mathbf{u})$ , we adopt a 2D exhaustive search to find the optimal solution of  $\mathbf{u}$  to Problem (8).

### C. Optimal Bandwidth Allocation

For Problem (6) with fixed transmit power, altitude and location, the bandwidth allocation problem is given by

$$\min_{\mathbf{a}} \sum_{k=1}^K a_k \left( 2^{\frac{R_{\min}}{a_k}} - 1 \right) C_k E_k \quad (15a)$$

### Algorithm 1: Iterative Algorithm

- 1: Check the feasibility of Problem (4). If Problem (4) is infeasible, terminate the algorithm. Otherwise, initialize a feasible solution  $(p_d^{(0)}, \mathbf{a}^{(0)}, \mathbf{u}^{(0)}, H^{(0)})$  and  $(p_k^u)^{(0)}$  according to (5). Set the iteration number  $n = 1$ .
- 2: **repeat**
- 3: With fixed  $\mathbf{a}^{(n-1)}$ ,  $\mathbf{u}^{(n-1)}$  and  $H^{(n-1)}$ , obtain the optimal  $p_d^{(n)}$  of Problem (7).
- 4: With fixed  $p_d^{(n)}$  and  $\mathbf{a}^{(n-1)}$ , obtain the optimal  $\mathbf{u}^{(n)}$  and  $H^{(n)}$  of Problem (8).
- 5: With fixed  $p_d^{(n)}$ ,  $\mathbf{u}^{(n)}$  and  $H^{(n)}$ , obtain the optimal  $\mathbf{a}^{(n)}$  of Problem (15), and  $(p_k^u)^{(n)}$  according to (5).
- 6: Set  $n = n + 1$ .
- 7: **until** the objective function (4a) convergence.
- 8: Output  $\mathbf{p}_u^* = \left( (p_1^u)^{(n)}, \dots, (p_K^u)^{(n)} \right)$ ,  $p_d^* = p_d^{(n)}$ ,  $\mathbf{u}^* = \mathbf{u}^{(n)}$ ,  $H^* = H^{(n)}$  and  $\mathbf{a}^* = \mathbf{a}^{(n)}$ .

$$\text{s.t.} \quad \sum_{k=1}^K \left( 2^{\frac{R_{\min}}{a_k}} - 1 \right) C_k Q_k \leq \beta_0 P_u^{\max}, \quad (15b)$$

$$(4f), (4g). \quad (15c)$$

where  $E_k = \frac{Q_k}{H^2 + \|\mathbf{u}\|^2}$  and  $Q_k = \|\mathbf{u} - \mathbf{g}_k\|^2 + H^2$ . We define function  $f(x) = x 2^{\frac{R_{\min}}{x}} - x$  for  $x > 0$ , and have

$$f''(x) = \frac{(\ln 2)^2 R_{\min}^2 2^{\frac{R_{\min}}{x}}}{x^3} > 0. \quad (16)$$

Based on (16), we observe that the objective function of Problem (15) is a convex function. Since constraint (15b) is convex, Problem (15) is a convex problem and it can be solved by analyzing the Karush-Kuhn-Tucker conditions with the same method adopted in [12, Appendix A].

### D. Iterative Algorithm and Complexity Analysis

The iterative algorithm for solving Problem (4) is given in Algorithm 1, which yields a suboptimal solution. Due to the fact that the optimal solution is obtained for each subproblem in each step, Algorithm 1 is guaranteed to converge. For the feasibility checking in Algorithm 1, the complexity mainly lies in interior point method. Since the dimension of the variables of bandwidth allocation problem is  $K$ , the complexity of solving it by using the interior point method is  $\mathcal{O}(L_i K^3)$  [13, p. 487 and 569], where  $L_i$  denotes the number of iterations for the interior point method. Let  $X$  and  $Y$  respectively denote the maximum searching distances of the horizontal and vertical location,  $\Delta l_x$  and  $\Delta l_y$  respectively denote the searching steps of the horizontal and vertical location. Since the 2D exhaustive search method is used, the complexity of feasibility checking algorithm is  $\mathcal{O}\left(\frac{L_i K^3 X Y}{\Delta l_x \Delta l_y}\right)$ . For each iteration in Algorithm 1, the major complexity mainly lies in solving the altitude and location planning problem. Since solving Problem (8) with fixed  $\mathbf{u}$  involves a complexity of  $\mathcal{O}(K)$  according to (13) and (14), the complexity of solving Problem (8) by 2D exhaustive search method is  $\mathcal{O}\left(\frac{K X Y}{\Delta l_x \Delta l_y}\right)$ . Therefore, the total complexity of Algorithm 1 is  $\mathcal{O}\left(\frac{K X Y}{\Delta l_x \Delta l_y} (L_o + L_i K^2)\right)$ , where  $L_o$  is the number of the outer iteration.

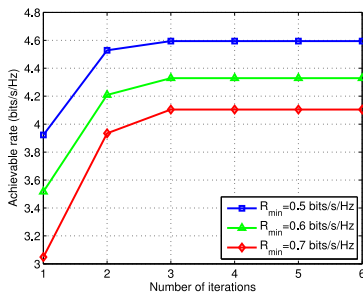


Fig. 1. Number of iterations using the proposed method.

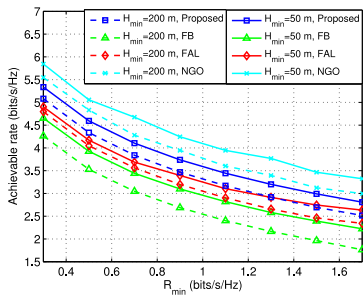


Fig. 2. D2D achievable rate versus minimal rate demand.

#### IV. NUMERICAL RESULTS

We consider a scenario where there are  $K = 3$  GTs and one D2D pair randomly distributed in a circle area with radius 300 m. The distance between the D2D transmitter and the corresponding receiver is set to 30 m. We set the total bandwidth of the system as 10 MHz,  $\beta_0 = 1.42 \times 10^{-4}$ ,  $\sigma^2 = -169$  dBm/Hz,  $H_{\min} = 50$  m,  $H_{\max} = 500$  m,  $P_d^{\max} = 10$  dBm and  $P_u^{\max} = 30$  dBm.

Similar to [14], the channel power gain  $h_k^d$  is modeled as  $\beta_0 \eta d^{-3}$ ,  $k = 0, 1, \dots, K$ , where  $d$  represents distance and  $\eta$  represents the Rayleigh fading coefficient, which follows the exponential distribution with unit mean. We compare the proposed algorithm with the following three algorithms: fixed altitude and location algorithm with optimized bandwidth (labeled as ‘FAL’), fixed bandwidth algorithm with optimized altitude and location (labeled as ‘FB’), and the near globally optimal algorithm via running the proposed iterative algorithm with 1000 initial points (labeled as ‘NGO’).

Firstly, we study the convergence behaviour of the proposed algorithm. Fig. 1 illustrates the achievable rate of the D2D pair versus the number of iterations when  $H_{\min} = 50$  m. It shows that the achievable rate of the D2D pair increases monotonically and converges rapidly.

The achievable rate of the D2D pair with different approaches versus  $R_{\min}$  when  $H_{\min} = 50$  m and  $H_{\min} = 200$  m is illustrated in Fig. 2. We observe that the achievable rate of the D2D pair decreases when  $H_{\min}$  is increased for all algorithms. Moreover, the altitude of the UAV cannot be too high or too low. If the altitude of the UAV is too high, the coverage region of the UAV is enhanced while the channel gain is weak, which leads to high transmit power from the UAV to satisfy the rate demand of GTs and severe interference to the D2D pair. If the altitude of the UAV is too low, the channel gains are high from the UAV to GTs and the D2D receiver, which will result in terrible interference to the D2D pair. From Fig. 2, we observe that the proposed algorithm respectively achieves 20% and 10%

average gain over the FB algorithm and the FAL algorithm when  $H_{\min} = 50$  m. When  $H_{\min} = 200$  m, the proposed algorithm respectively achieves 30% and 8% average gain over the FB algorithm and the FAL algorithm. This is because the proposed algorithm jointly optimizes transmit power, altitude, location and bandwidth. Considering the pre-allocated bandwidth of each GT, the FB algorithm performs worst among all approaches, which indicates that the bandwidth allocation dominates the altitude and location planning in enhancing the D2D achievable rate. It is also observed that the NGO algorithm outperforms the proposed algorithm at the cost of some additional computations.

#### V. CONCLUSION

In this letter, we aim to maximize the rate of a D2D pair with the coexistence between the UAV and an underlaid D2D communication network in a downlink scenario. Numerical results show that the proposed algorithm always outperforms the algorithms which partially optimize altitude, location or bandwidth. Moreover, the altitude of the UAV cannot be too high or too low because the altitude of the UAV has an important influence on the UAV-aided networks with underlaid D2D communications.

#### REFERENCES

- [1] Y. Zeng, R. Zhang, and T. J. Lim, “Wireless communications with unmanned aerial vehicles: Opportunities and challenges,” *IEEE Commun. Mag.*, vol. 54, no. 5, pp. 36–42, May 2016.
- [2] M. Mozaffari, W. Saad, M. Bennis, and M. Debbah, “Efficient deployment of multiple unmanned aerial vehicles for optimal wireless coverage,” *IEEE Commun. Lett.*, vol. 20, no. 8, pp. 1647–1650, Aug. 2016.
- [3] V. Sharma, M. Bennis, and R. Kumar, “UAV-assisted heterogeneous networks for capacity enhancement,” *IEEE Commun. Lett.*, vol. 20, no. 6, pp. 1207–1210, Jun. 2016.
- [4] H. He, S. Zhang, Y. Zeng, and R. Zhang, “Joint altitude and beamwidth optimization for UAV-enabled multiuser communications,” *IEEE Commun. Lett.*, vol. 22, no. 2, pp. 344–347, Feb. 2018.
- [5] Z. Yang *et al.*, “Joint altitude, beamwidth, location, and bandwidth optimization for UAV-enabled communications,” *IEEE Commun. Lett.*, vol. 22, no. 8, pp. 1716–1719, Aug. 2018.
- [6] M. N. Tehrani, M. Uysal, and H. Yanikomeroglu, “Device-to-device communication in 5G cellular networks: Challenges, solutions, and future directions,” *IEEE Commun. Mag.*, vol. 52, no. 5, pp. 86–92, May 2014.
- [7] C.-H. Yu, K. Doppler, C. B. Ribeiro, and O. Tirkkonen, “Resource sharing optimization for device-to-device communication underlaying cellular networks,” *IEEE Trans. Wireless Commun.*, vol. 10, no. 8, pp. 2752–2763, Aug. 2011.
- [8] E. Christy *et al.*, “Optimum UAV flying path for device-to-device communications in disaster area,” in *Proc. IEEE Int. Conf. Signal Syst.*, Denpasar, Indonesia, May 2017, pp. 318–322.
- [9] M. Mozaffari, W. Saad, M. Bennis, and M. Debbah, “Unmanned aerial vehicle with underlaid device-to-device communications: Performance and tradeoffs,” *IEEE Trans. Wireless Commun.*, vol. 15, no. 6, pp. 3949–3963, Jun. 2016.
- [10] Q. Wu, G. Y. Li, W. Chen, and D. W. K. Ng, “Energy-efficient D2D overlaying communications with spectrum-power trading,” *IEEE Trans. Wireless Commun.*, vol. 16, no. 7, pp. 4404–4419, Jul. 2017.
- [11] Z. Yang *et al.*, “Downlink resource allocation and power control for device-to-device communication underlaying cellular networks,” *IEEE Commun. Lett.*, vol. 20, no. 7, pp. 1449–1452, Jul. 2016.
- [12] Z. Yang, C. Pan, W. Xu, H. Xu, and M. Chen, “Joint time allocation and power control in multicell networks with load coupling: Energy saving and rate improvement,” *IEEE Trans. Veh. Technol.*, vol. 66, no. 11, pp. 10470–10485, Nov. 2017.
- [13] S. Boyd and L. Vandenberghe, *Convex Optimization*. Cambridge, U.K.: Cambridge Univ. Press, 2004.
- [14] T. D. Hoang, L. B. Le, and T. Le-Ngoc, “Energy-efficient resource allocation for D2D communications in cellular networks,” *IEEE Trans. Veh. Technol.*, vol. 65, no. 9, pp. 6972–6986, Sep. 2016.